


# CELL300

- Designed for 60-63.5mm (2 3/8"-2 1/2") diameter tubes
- Precision extruded high tensile aluminium alloy
- DGUV17/BGV C1 rating
- Compatible with M950 / 4GS-91
- Mounting hole for up to 13mm (1/2") bolts
- Polished surface with laser markings
- Powder coated versions available on request
- Rated with SF 8:1 (kg) DGUV17/BGV C1 (SWL1)
- Rated with SF 4:1 (kg) 2006/42/EC (SWL2)
- Black anodized versions available



**Cell 300 series**

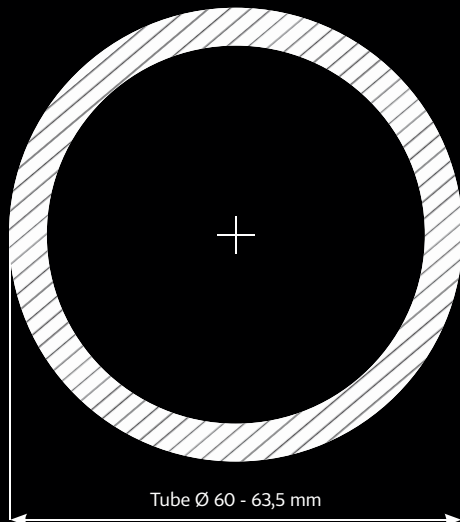



**CELL301 / CELL301|anodized**

Basic clamp

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		650 (1433)	1300 (2865)	0.65 (1.43)	60-63.5 mm (2.36"-2.5")

Basic Clamp can be used for most applications.




**CELL302 / CELL302|anodized**

Clamp with bolt and wingnut

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		650 (1433)	1300 (2865)	0.75 (1.65)	60-63.5 mm (2.36"-2.5")

Clamp supplied with M12 x 35 bolt and wingnut.

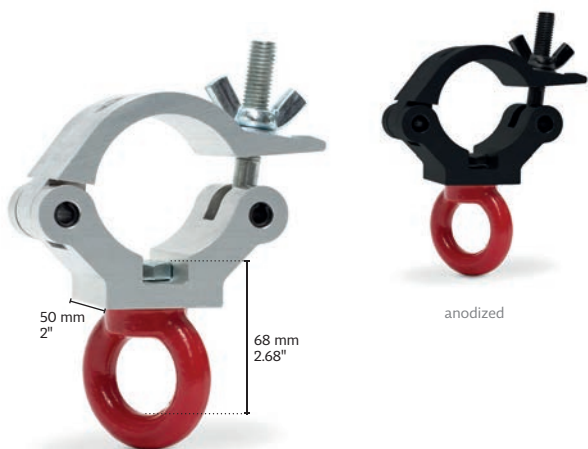


**CELL303|650kg / CELL303|anodized**

Clamp with lifting eye

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		650 (1433)	1300 (2865)	1.00 (2.20)	60-63.5 mm (2.36"-2.5")

Clamp supplied with steel eye for attachment of rope or cable.  
Version with SWL 340 kg (750 lbs) silver lifting eye (61 mm) available

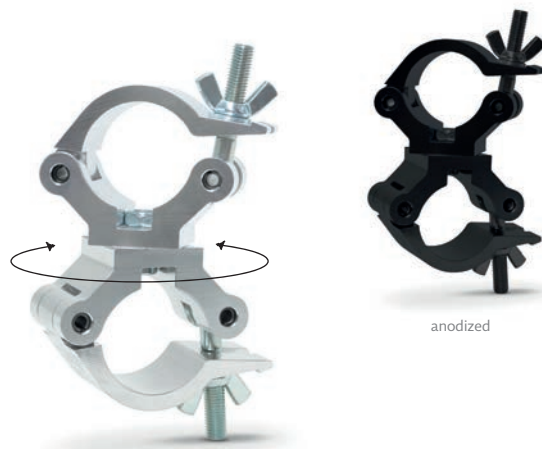


**CELL304 / CELL304|anodized**

Swivel coupler

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		650 (1433)	1300 (2865)	1.50 (3.30)	60-63.5 mm (2.36"-2.5")

Set of two clamps free to rotate 360° for connection of two tubes.



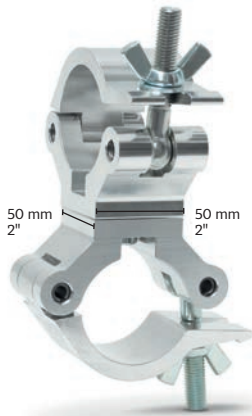


**CELL305 / CELL305|anodized**

90° fixed coupler

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		650 (1433)	1300 (2865)	1.50 (3.30)	60-63.5 mm (2.36"-2.5")

Set of two clamps fixed at 90° to each other for connection of two tubes.

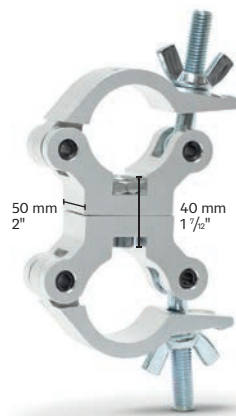

**CELL306 / CELL306|anodized**

Parallel coupler

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		650 (1433)	1300 (2865)	1.50 (3.30)	60-63.5 mm (2.36"-2.5")

Set of two clamps fixed parallel to each other for connection of two tubes.




**CELL307 / CELL307|anodized**

Slim basic clamp

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		650 (1433)	1300 (2866)	0.4 (0.88)	60-63.5 mm (2.36"-2.5")

Slim basic clamp can be used for most applications.

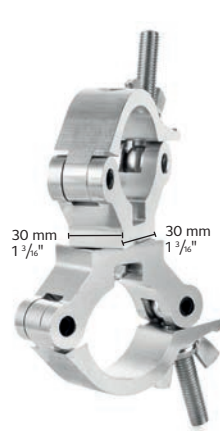

**CELL314 / CELL314|anodized**

Swivel coupler

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		650 (1433)	1300 (2866)	0.81 (1.79)	60-63.5 mm (2.36"-2.5")

60-63.5mm Slim Swivel Coupler (CELL307 + CELL307 Assy)



