


MT-ICON-PA

- Robust and stable due to steel MT-IconBase
- Ensures effective deployment of ballast
- Elevated hanging points
- Multiple attachment points on base
- Compact footprint
- Manual or electric hoist can be used on head-section or icon base connection
- Erecting helper available
- Spindle feet with large contact surface
- Quick & Easy assembly

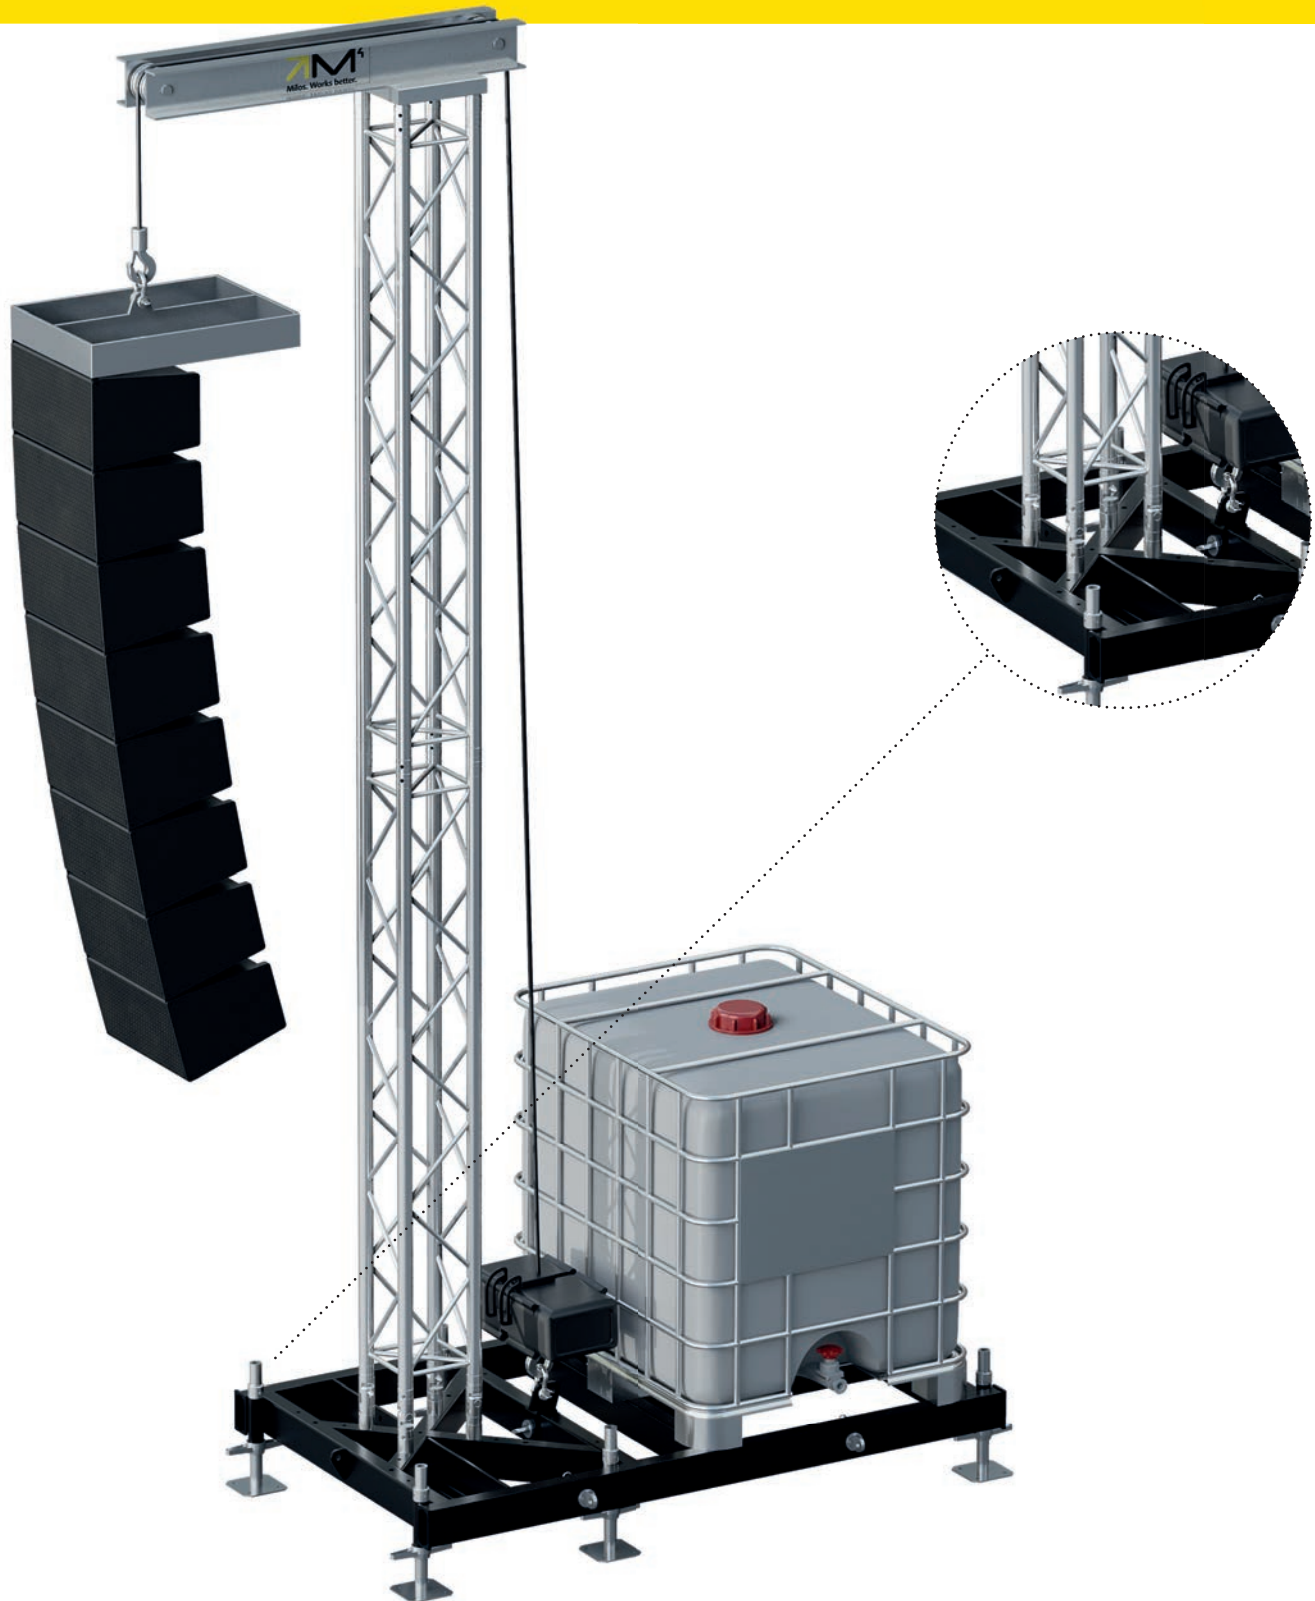

MT-ICON-PA5040





MT-IconBase-01 STEEL	1 piece
MT-IconBase-07B Hinges 4pcs	1 piece
MT-IconBase-08B FemaleCon 4pcs	1 piece
MT-IconBaseHanger	1 piece
MT-PA5030-02 Headsection	1 piece
Truss M290	4 m (13.12 ft)
WLL	kg lbs 400 (881.85)
Selfweight	kg lbs 220 (485.01)
Height	m ft 5 (16.40)
Footprint	m ft 2.15 x 1.2 (7.05x3.93)
Ballast required	kg lbs 1000 (2204,62)

MT-ICON-PA8080

MT-IconBase-01 STEEL	1 piece
MT-IconBaseLongOutrigger-05 STEEL	2 pieces
MT-IconBase-07B Hinges 4pcs	1 piece
MT-IconBase-08B FemaleCon 4pcs	1 piece
MT-Icon-PA8080-10 BallastFixSet	1 piece
MT-Icon-PA8080-02 Headsection	1 piece
Truss M390 Heavy-Duty	7 m (22.96 ft)
WLL	kg lbs 800 (1763.69)
Selfweight	kg lbs 310 (683.43)
Height	m ft 8 (26.24)
Footprint	m ft 3.5 x 1.2 (10.33x3.93)
Ballast required	kg lbs 3000 (6613.86)

MT-ICON-PA100100

MT-IconBase-01 STEEL	1 piece
MT-IconBaseLongOutrigger-05 STEEL	2 pieces
MT-IconBase-07O Hinges 4pcs	1 piece
MT-IconBase-08O FemaleCon 4pcs	1 piece
MT-Icon-PA100100-10 BallastFixSet	1 piece
MT-Icon-PA100100-02 Headsection M520	1 piece
Truss M520	9 m (29.52 ft)
WLL	kg lbs 1000 (2204.62)
Selfweight	kg lbs 410 (903.89)
Height	m ft 10 (32.80)
Footprint	m ft 3.5 x 1.2 (10.33x3.93)
Ballast required	kg lbs 4000 (8818.49)

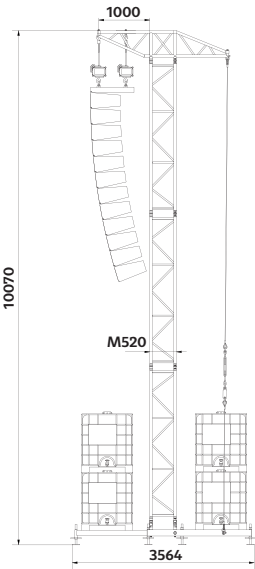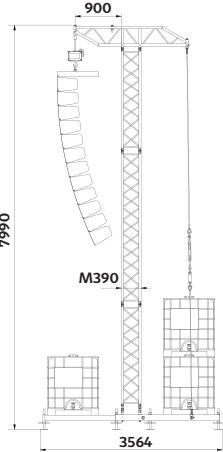

MT-IconBase-01|STEEL

Weight	kg lbs 156 (34.3)
Footprint extendable by outriggers on front and/or rear side to up to 7980x1200 mm	



MT- Icon Base Long Outrigger

Weight	kg lbs 21 (46.29)
Outrigger extension arm	



MT- Icon Base Hanger

Weight	kg lbs 3.2kg (7.05)
Chain hoist bracket	