


CELL130

- Designed to fit 32mm (1 1/4") to 35mm (1 3/8") truss tubes
- Precision extruded high tensile aluminium alloy
- Compatible with M222 truss series
- CE certified
- Polished surface with laser markings
- Rated with SF 8:1 (kg) DGUV17/BGV C1 (SWL1)
- Rated with SF 4:1 (kg) 2006/42/EC (SWL2)
- Interchangeable M10 screw ensures flexible attachment points
- Powder coated versions available on request
- Black anodized versions available

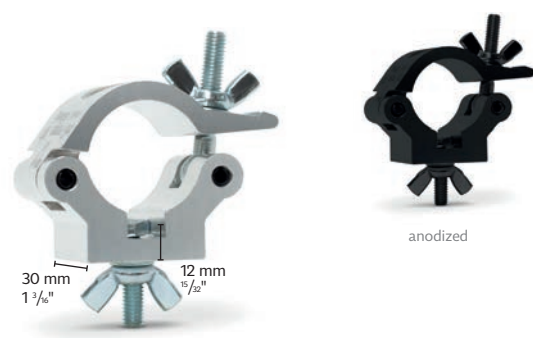



CELL131 / CELL131|anodized

Basic clamp

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		160 (353)	330 (728)	0.10 (0.20)	32-35 mm (1.26"-1.38")

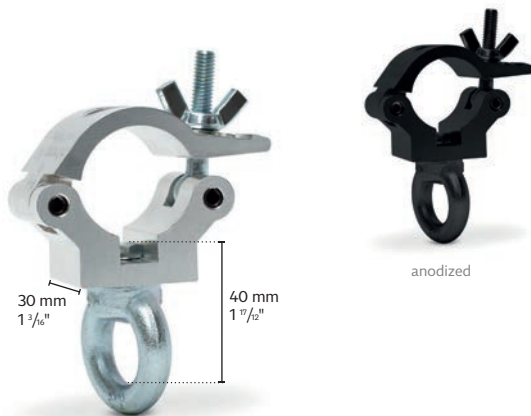
Basic Clamp can be used for most applications.


CELL132 / CELL132|anodized

Clamp with bolt and wingnut

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		160 (353)	330 (728)	0.25 (0.33)	32-35 mm (1.26"-1.38")

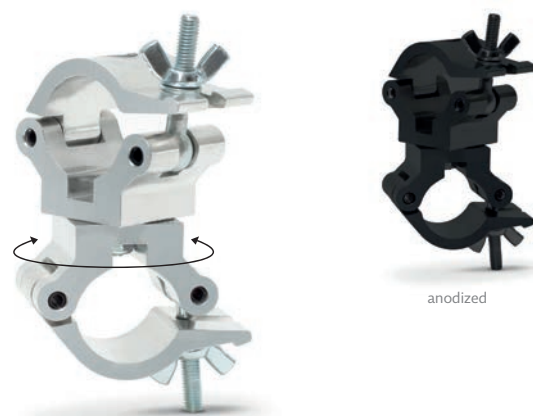
Clamp supplied with M10 x 30 bolt and wingnut.


CELL133 / CELL133|anodized

Clamp with lifting eye

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		160 (353)	330 (728)	0.70 (1.54)	32-35 mm (1.26"-1.38")

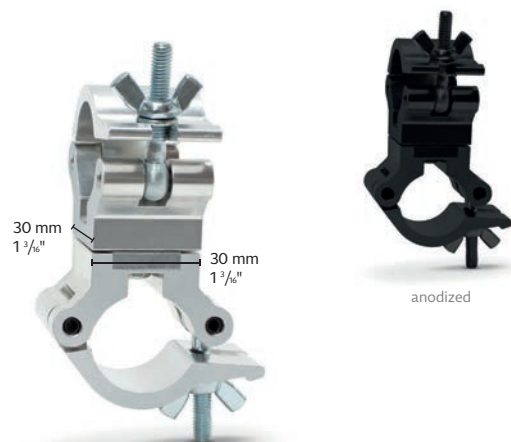
Clamp with lifting eye


CELL134 / CELL134|anodized

Swivel coupler

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		160 (353)	330 (728)	0.80 (1.76)	32-35 mm (1.26"-1.38")

Set of two clamps free to rotate 360° for connection of two tubes.


CELL135 / CELL135|anodized

90° fixed coupler

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		160 (353)	330 (728)	0.80 (1.76)	32-35 mm (1.26"-1.38")

90° fixed coupler


CELL136 / CELL136|anodized

Parallel coupler

kg	lbs	SWL1	SWL2	Weight	Tube Ø
		160 (353)	330 (728)	0.80 (1.76)	32-35 mm (1.26"-1.38")

Set of two clamps fixed parallel to each other for connection of two tubes.



anodized



CELL143 / CELL143|anodized

Boom Arm

	L1	L2	L3	Tube \varnothing
mm	250 (39.37")	500 (19.69")	750 (29.52")	32-35 mm (1.26"-1.38")
in				

Tube 32x1.5mm also available in custom lengths.



